

FCA-401 OPTICAL FIBER ARMoured CABLE


Application:

- Adopted to outdoor distribution
- Connected to connectors of various models interconnect
- Can be installed conveniently and operated simply

Characteristics:

- More single-core cable design
- Steel tape armoured
- Waterproof and applicable scurviness environment

Cable Structure:

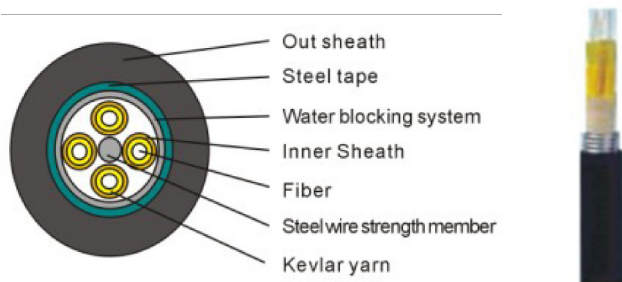

Technical Parameters:

Fiber Count			2	4	6
Cable Diameter		mm	10.5	10.5	11.5
Cable Weight		kg/1km	155	155	185
Tensile	Long Term	N	600	600	600
	Short Term		1500	1500	1500
Crush	Long Term	N/100mm	300	300	300
	Short Term		1000	1000	1000
Min. Bend Radius	Dynamic	mm	20D	20D	20D
	Static		10D	10D	10D
Range of Temperature		C	-20 ~ +60	-20 ~ +60	-20 ~ +60