


BSR-212 DIGITAL SATELLITE RECEIVER

FEATURES:

- Reception of FTA DVB-S programs
- Compatible with DVB-S/S2
- C and Ku bands
- 2x AV output
- Support final channel autosaving
- LCD display and control setting on front panel
- 19"/1U cabinet rack mount type

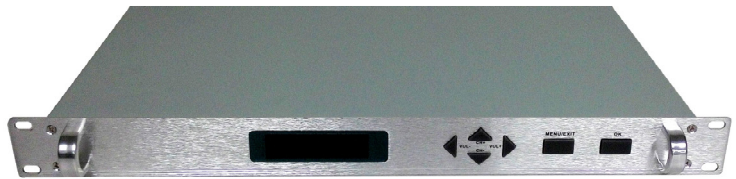

TECHNICAL SPECIFICATIONS:

Input section (xPSK)	Input frequency range	950~2150MHz
	Input level	-65~-25dBm
	IF band width	27~36MHz
	To LNB power	13 / 18VDC +/-10% 0.5A (max)
	LNB tone switch control	22KHz tone / DiSEqC 1.2
	Loop-out loss	-1dB
	Connector	F type (75Ω)

Demodulation section	Decode format	MPEG-2
	Symbol rate	2~45ms/s
	Waveform	QPSK (SCPC, MCPC)
	Bite rate	15Mbps

Output section (Video)	Format	PAL / NTSC
	Output level	1V ±20mV (p-p)
	Resolution	720x576 (PAL), 720x480 (NTSC)
	Connector	RCA

Output section (Audio)	Frequency response	20Hz~20KHz
	Sampling frequency	32, 44.1, 48KHz
	Connector	RCA

General	Mains supply voltage	220VAC ±10%
	Consumption	20W
	Dimensions	44mm(H) x 482mm(W) x 250mm(D)
	Weight	3kg
	Temperature	0~45°C (operating), -20~80°C (storage)